



J200UC

DIESEL GENSET

MODEL	J200UC
Stand-by Power @ 60Hz	200kW / 250 kVA
Prime Power @ 60Hz	182 kW / 227 kVA

Standard Features

General features :

- Engine (JOHN DEERE , 6068HF475)
- Engine EPA Carb Charge alternator 12 V , Governor:Elec
- Alternator (LEROY SOMER , LSA462M5)
- Single bearing alternator IP 23 , insulation class H /H
- Radiator 50°C [122°F]°C max. T° air inlet with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- Microprocessor control panel
- 12 V battery, rack and cable
- Industrial silencer (loose)
- User manual ^pCSA Certified (consult us)



Generator Ratings

Voltage	HZ	Phase	P.F	Standby Amps	Standby Ratings kW/kVA	Prime Ratings kW/kVA
480/277	60	3	0.8	301	200 / 250	182 / 227
440/254	60	3	0.8	328	200 / 250	182 / 227
380/220	60	3	0.8	380	200 / 250	182 / 227
240/120	60	3	0.8	573	190 / 238	173 / 216
230/115	60	3	0.8	580	185 / 231	168 / 210
220/127	60	3	0.8	656	200 / 250	182 / 227
208/120	60	3	0.8	661	190 / 238	173 / 216
600/347	60	3	0.8	241	200 / 250	182 / 227

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. A 10% overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

Conditions of sale

- SDMO provides a full line of products with high quality recognized engines and alternators.
- Service and parts are available from SDMO distributors as a single source of responsibility.
- Each and every units is factory tested. All generator sets are also prototype tested.
- Warranty according to our standard conditions. Five years extended also available



ENGINE DATA

Manufacturer / Model	JOHN DEERE 6068HF475 , 4-cycle, Turbo , Air/Air DC
Cylinder Arrangement	6 X L
Displacement	6.72L [410.1C.I.]
Bore and Stroke	106mm [4.2in.] X 127mm [5.0in.]
Compression ratio	17:1
Rated RPM	1800 Rpm
Piston Speed	7.62m/s [25.0ft./s]
Max. stand by Power at rated RPM	229kW [307BHP]
Frequency regulation, steady state	+/-0, 5%
BMEP	20.8bar [301psi]
Governor : type	Elec

Exhaust System

Exhaust gas flow	622L/s [1318cfm]
Exhaust temperature	533°C [991°F]
Max back pressure	750mm CE [30in. WG]

Fuel System

110% (Stand By power)	56.0L/h [14.8gal/hr]
100% (of the Prime Power)	49.9L/h [13.2gal/hr]
75% (of the Prime Power)	36.9L/h [9.7gal/hr]
50% (of the Prime Power)	25.3L/h [6.7gal/hr]
Total fuel flow	89L/h [23.5gal/hr]

Oil System

Total oil capacity w/filters	33L [8.7gal]
Oil Pressure low idle	1bar [14.5psi]
Oil Pressure rated RPM	5bar [72.5psi]
Oil consumption 100% load	0.04L/h [0.0gal/hr]
Oil capacity carter	32L [8.5gal]

Thermal balance 100% load

Heat rejection to exhaust	158kW [8984Btu/mn]
Radiated heat to ambient	25.5kW [1450Btu/mn]
Heat rejection to coolant	N/A

Air intake

Max. intake restriction	625mm CE [25in. WG]
Engine air flow	233L/s [494cfm]

Coolant System

Radiator & engine capacity	30L [7.9gal]
Max water temperature	105°C [221°F]
Outlet water temperature	93°C [199°F]
Fan power	5 kW
Fan air flow	6.4m ³ /s [13562cfm]
Available restriction on air flow	20mm CE [0.8in. WG]
Type of coolant	Coolelf sx
Thermostat	82-94 °C

Emissions

HC	45.51 gr/bhp/h
CO	0.75 gr/bhp/h
Nox	45.51 gr/bhp/h
PM	5.22 gr/bhp/h



ALTERNATOR SPECIFICATIONS

GENERAL DATA

- Compliance with NEMA MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards.
- Vacuum-impregnated windings with epoxy varnish.
- IP21 drip proof.

ALTERNATOR DATA

Manufacturer / Type	LEROY SOMER LSA462M5
Number of phase	3
Power factor (Cos Phi)	0.8
Altitude	< 1000 m
Overspeed	2250 rpm
Pole : number	4
Exciter type	SHUNT
Insulation : class, temperature rise	H / H
Voltage regulator	R230
Sustained short circuit current	N/A
Total harmonics (TGH/THC)	< 4%
Wave form : NEMA = TIF – TGH/THC	< 50
Wave form : CEI = FHT – TGH/THC	< 2%
Bearing : number	1
Coupling	Direct
Voltage regulation 0 to 100% load	+/- 1%
Recovery time (20% Volt dip) ms	< 500 ms
SKVA with 90 % of nominal sustained voltage (at 0.4 PF)	580

OTHER ALTERNATOR DATA

Continuous nominal rating @ 40°C	250 kVA
Standby rating @ 27°C	273 kVA
Efficiencies @ 4/4 load	92.7 %
Air flow	0.51m ³ /s [1080.62cfm]
Short circuit ratio;50 (Kcc)	0.44
Direct axis synchro reactance unsaturated (Xd)	307 %
Quadra axis synchro reactance unsaturated (Xq)	184 %
Open circuit time constant;50 (T'do)	2050 ms
Direct axis transient reactance saturated (X'd)	15 %
Short circuit transient time constant (T'd)	105 ms
Direct axis subtransient reactance saturated (X''d)	9 %
Subtransient time constant (T''d)	10 ms
Quadra axis subtransient reactance saturated (X''q)	11.2 %
Zero sequence reactance unsaturated (Xo)	0.5 %
Negative sequence reactance saturated (X2)	10.1 %
Armature time constant (Ta)	16 ms
No load excitation current (io)	1.1 A
Full load excitation current (ic)	3.8 A
Full load excitation voltage (uc)	33 V
Recovery time (Delta U = 20% transitoire)	< 500 ms
Motor start (Delta = 20% perm. Or 50% trans.)	610 kVA
Transient dip (4/4 charge) – PF : 1.8 AR	15.6 %
No load losses	4.5 kW
Heat rejection	15.2 kW



Control Panels

NEXYS



Specifications :
Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, Overcrank, Overspeed (>60 kVA), Min/max alternator, Low fuel level, Emergency stop

Engine parameters Hours counter, Engine speed, Battery voltage, Fuel level, Air preheating

TELYS



Specifications :
Frequency meter, Ammeter, Voltmeter
Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop

Engine parameters Hours counter, Oil pressure, Water temperature, Engine speed, Battery voltage, Fuel level




Options

<p>Engine and Radiator</p> <ul style="list-style-type: none"> • Heat shield protection • Oil drain extension • Heavy duty air filter • Lube oil drain pump • Radiator core guard • Battery charger • Block heater 	<p>Alternator</p> <ul style="list-style-type: none"> • Anti condensation heater • Enforced impregnation • Oversized alternator 	<p>Control panel</p> <ul style="list-style-type: none"> • • NFPA 110 level 1 • • Paralleling system • • Remote annunciator • • Oil temperature shutdown • Key start panel
<p>Fuel</p> <ul style="list-style-type: none"> • Day tank • Subbase fuel tanks UL • Water separator fuel filter 	<p>Exhaust</p> <ul style="list-style-type: none"> • Residential silencer • Critical silencer • Flexible exhaust conn. 	<p>Literature</p> <ul style="list-style-type: none"> • • Parts • • Maintenance
<p>Enclosure</p> <ul style="list-style-type: none"> • M226 • Silent 70.1 db @ 7m [23 Ft] (stby) 		

Weight and Dimensions


Open Model Excluding option

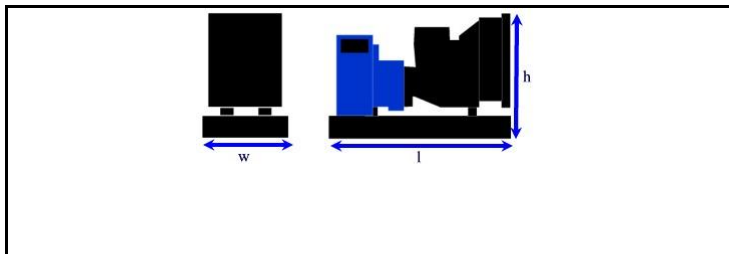

Overall size l x w x h :
 2370mm [93in] x 1114mm [44in] x 1480mm [58in]

Weight :
 1650kg [3637lbs] Net 1690kg [3725lbs] Brut

With Optional Enclosure

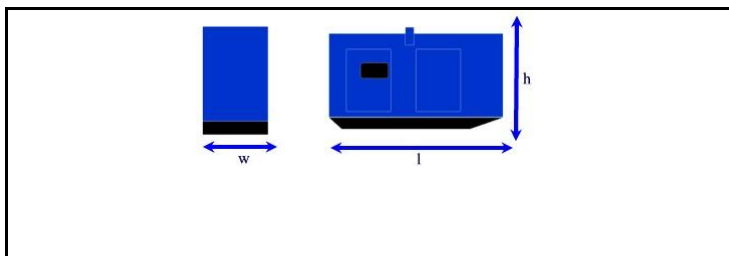

Overall size l x w x h :
 3508mm [138in] x 1200mm [47in] x 1830mm [72in]

Weight :
 2274kg [5012lbs] Net 2336kg [5149lbs] Brut

